



Dimensions

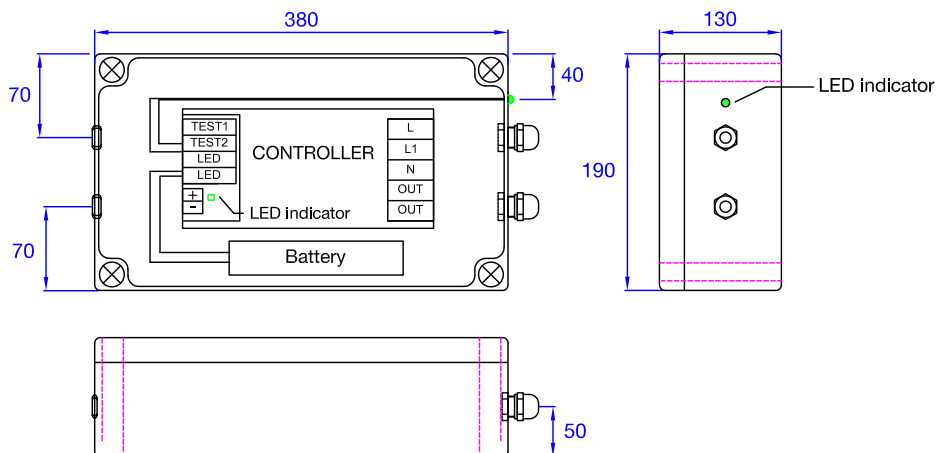

Wiring

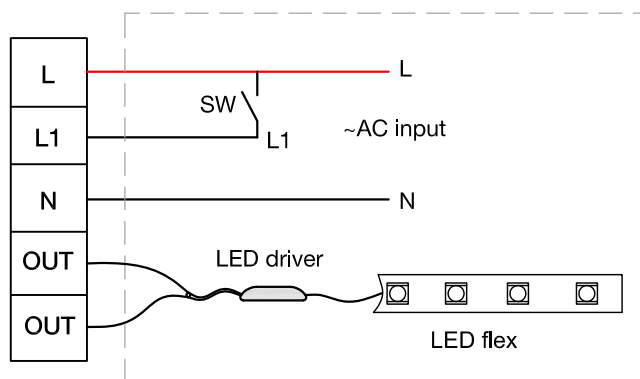

Connection Instructions

- 1: The LED driver can accept both 230VAC and 220VDC.
- 2: The 'OUT' terminals on the charging unit are polarity free.

Specification

Model	Input Voltage	Output Voltage	Emergency Wattage	Standby Time
04.EP.BND.11	220VAC - 240VAC	220VDC	80W / 11m Flex	180 minutes
04.EP.BND.17	220VAC - 240VAC	220VDC	120W / 17m Flex	
04.EP.BND.25	220VAC - 240VAC	220VDC	180W / 25m Flex	



Battery pack must be recharged every 3 months!
Battery pack must be changed after 3 years!