



Dimensions:

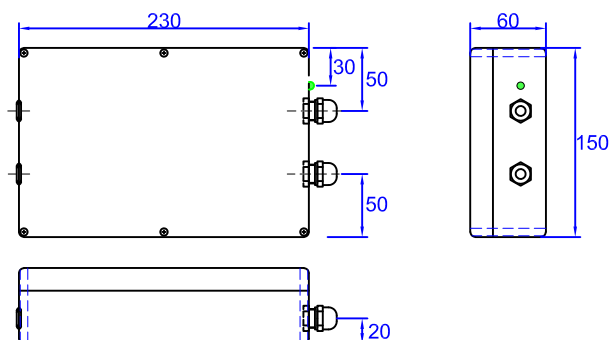

Wiring:

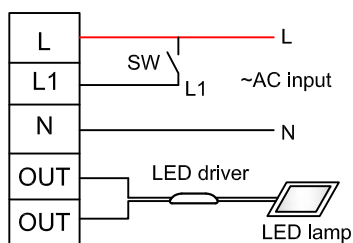

LED indicator status:

	Charging
	Charging completed
	Main power off

Connection Instructions:

- 1: Please note that the LED driver can accept both 220VDC and 220VAC.
- 2: The 'OUT' terminals can accept both Normal Polarity and Reverse Polarity.

Specification:

Model	Input Voltage	Output Voltage	Emergency Wattage	Standby Time
04.EP.LPG3.12W	220-240VAC	220VDC	12W	3 HOURS
04.EP.LPG3.24W	220-240VAC	220VDC	24W	
04.EP.LPG3.45W	220-240VAC	220VDC	45W	
Other emergency wattages optional				



Battery pack to be changed after 3 years